


- EURO Life Support Products -

HME FLEX

The HME giving a patent alleviation in the torque on the tracheal tube.

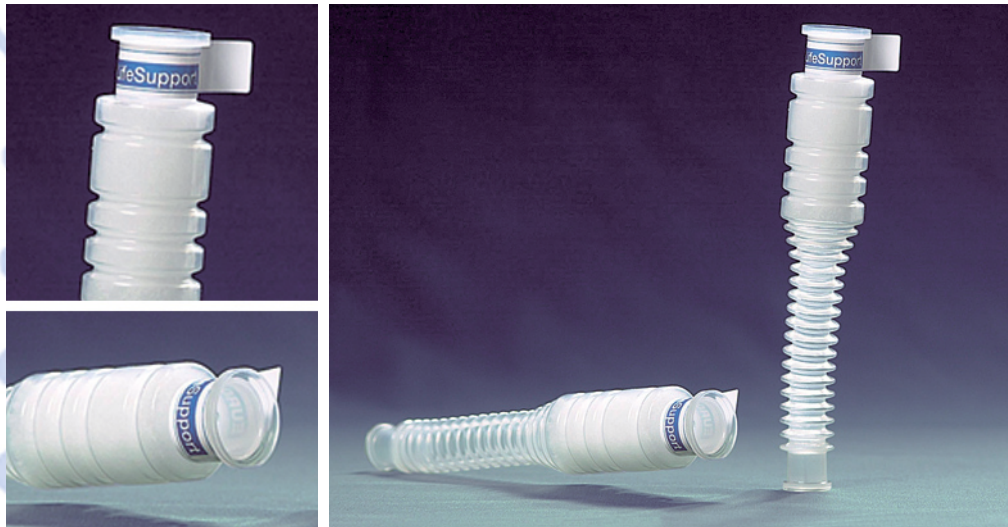

Product specification

Physical measures		
House	Length overall:	206 mm
	Length flexible part:	102 mm
Insert	Female connector:	22 mm according to ISO/DIS 5356-1 std
	Female connector:	15 mm according to ISO/DIS 5356-1 std
Weight:	Diameter x length:	Ø39 x 63 mm
		16,3 g
Recommended tidal volume range:		500 – 1500 ml
Dead space:		90 ml
Resistance		
Average at 60 l/min:		200 Pa equivalent to 2,04 cm H ₂ O
Moisture, output to patient:		33 mg H ₂ O/l Assuming exp. gas, 37 °C, tidal vol. 500 ml
Quantity per case:		15 pcs
Technical data acc. to		ISO 9360-1:2000



Postal Address AB ULAX, P.O. Box 5096, SE-591 05 MOTALA
 Visiting Address Mercuriusgatan 8 • Phone +46 141 23 70 90
 Fax +46 141 23 70 99

